



PRODUCT FEATURES

- 1200V IGBT chip in trench FS-technology
- Low switching losses
- $V_{CE(sat)}$ with positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery

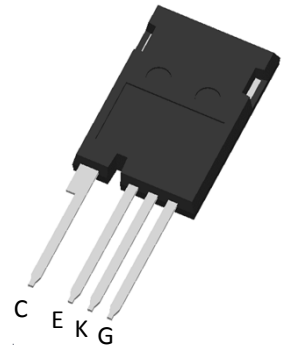

APPLICATIONS

- Motor control
- UPS/PFC
- General purpose inverters

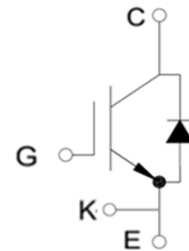

Type	V_{CES}	I_C	$V_{CE(sat)}$ $T_J=25^\circ C$	T_{Jmax}	Marking	Package
MM75G5U120BKM	1200V	75A	1.7V	175°C	MM75G5U120BKM	TO-247 PLUS-4L

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

MM75G5U120BKM

ABSOLUTE MAXIMUM RATINGS($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_{CES}	Collector Emitter Voltage	$T_J=25^{\circ}\text{C}$	1200	V
V_{GES}	Gate Emitter Voltage		± 20	
	Transient Gate Emitter Voltage ($t_p \leq 10\mu\text{s}, D < 0.01$)		± 30	
I_C	DC Collector Current	$T_C=25^{\circ}\text{C}$	150	A
		$T_C=100^{\circ}\text{C}$	75	
I_{Cpuls}	Pulsed collector current, t_p limited by T_{Jmax}		300	
P_{tot}	Power Dissipation Per IGBT		535	W
V_{RRM}	Repetitive Reverse Voltage	$T_J=25^{\circ}\text{C}$	1200	V
I_F	Forward Current	$T_C=25^{\circ}\text{C}$	150	A
		$T_C=100^{\circ}\text{C}$	75	
I_{Fpuls}	Diode pulsed current, t_p limited by T_{Jmax}		300	
T_{Jmax}	Max. Junction Temperature		175	°C
T_{Jop}	Operating Temperature		-40~175	
T_{stg}	Storage Temperature		-55~150	
T_{SLD}	Wave Soldering 1.6mm (0.063in.) from case for 10s		260	
Torque	to heatsink	Recommended (M3)	1.1	Nm
Weight			8	g

THERMAL RESISTANCE($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
R_{thJC}	Junction to Case Thermal Resistance (IGBT)			0.28	K /W
R_{thJCD}	Junction to Case Thermal Resistance (Diode)			0.49	
R_{thJA}	Junction to Ambient Thermal Resistance			40	

MM75G5U120BKM

IGBT

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$V_{GE(th)}$	Gate Emitter Threshold Voltage	$V_{CE}=V_{GE}, I_C=3.0\text{mA}$	4.9	5.9	6.9	V
$V_{CE(sat)}$	Collector Emitter Saturation Voltage	$I_C=75\text{A}, V_{GE}=15\text{V}, T_J=25^\circ\text{C}$		1.7	2.0	
		$I_C=75\text{A}, V_{GE}=15\text{V}, T_J=125^\circ\text{C}$		2.05		
		$I_C=75\text{A}, V_{GE}=15\text{V}, T_J=150^\circ\text{C}$		2.15		
I_{CES}	Collector Leakage Current	$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$			100	μA
		$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=150^\circ\text{C}$			5	mA
I_{GES}	Gate Leakage Current	$V_{CE}=0\text{V}, V_{GE}=\pm 20\text{V}, T_J=25^\circ\text{C}$	-200		200	nA
g_{fs}	Transconductance	$V_{CE}=20\text{V}, I_C=75\text{A}, T_J=25^\circ\text{C}$		90		S
Q_G	Gate Charge	$V_{CE}=600\text{V}, I_C=75\text{A}, V_{GE}=15\text{V}$		0.25		μC
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		6810		pF
C_{oes}	Output Capacitance			280		
C_{res}	Reverse Transfer Capacitance			49		
$t_{d(on)}$	Turn on Delay Time	$V_{CC}=600\text{V}, I_C=75\text{A}$ $R_G=10\Omega,$ $V_{GE}=15\text{V},$ Inductive Load	$T_J=25^\circ\text{C}$	58		ns
			$T_J=125^\circ\text{C}$	56		ns
			$T_J=150^\circ\text{C}$	56		ns
t_r	Rise Time		$T_J=25^\circ\text{C}$	30		ns
			$T_J=125^\circ\text{C}$	34		ns
			$T_J=150^\circ\text{C}$	34		ns
$t_{d(off)}$	Turn off Delay Time	$T_J=25^\circ\text{C}$	230		ns	
		$T_J=125^\circ\text{C}$	240		ns	
		$T_J=150^\circ\text{C}$	245		ns	
t_f	Fall Time	$T_J=25^\circ\text{C}$	95		ns	
		$T_J=125^\circ\text{C}$	120		ns	
		$T_J=150^\circ\text{C}$	130		ns	
E_{on}	Turn on Energy	$V_{CC}=600\text{V}, I_C=75\text{A}$ $R_G=10\Omega,$ $V_{GE}=15\text{V},$ Inductive Load	$T_J=125^\circ\text{C}$	5.7		mJ
			$T_J=150^\circ\text{C}$	6.3		mJ
E_{off}	Turn off Energy		$T_J=125^\circ\text{C}$	3.7		mJ
			$T_J=150^\circ\text{C}$	4.0		mJ

Anti-Parallel Diode

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
V_F	Forward Voltage	$I_F=75\text{A}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		2	2.5	V
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		1.75		
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_J=150^\circ\text{C}$		1.7		
t_{rr}	Reverse Recovery Time	$I_F=75\text{A}, V_R=600\text{V}$ $dI_F/dt=-730\text{A}/\mu\text{s}$ $T_J=150^\circ\text{C}$		670		ns
I_{RRM}	Max. Reverse Recovery Current			42		A
Q_{RR}	Reverse Recovery Charge			13.4		μC
E_{rec}	Reverse Recovery Energy			5.8		mJ

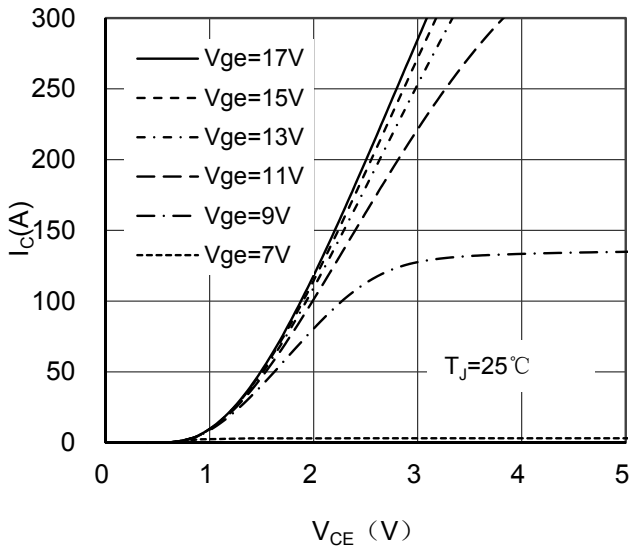


Figure 1. Typical Output Characteristics

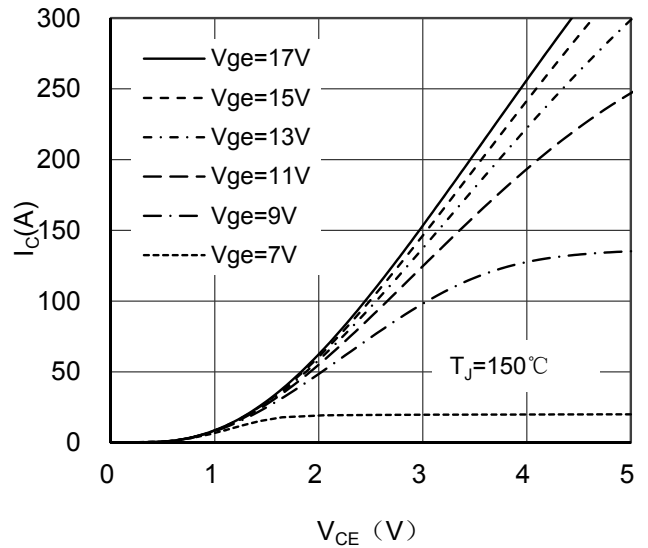


Figure 2. Typical Output Characteristics

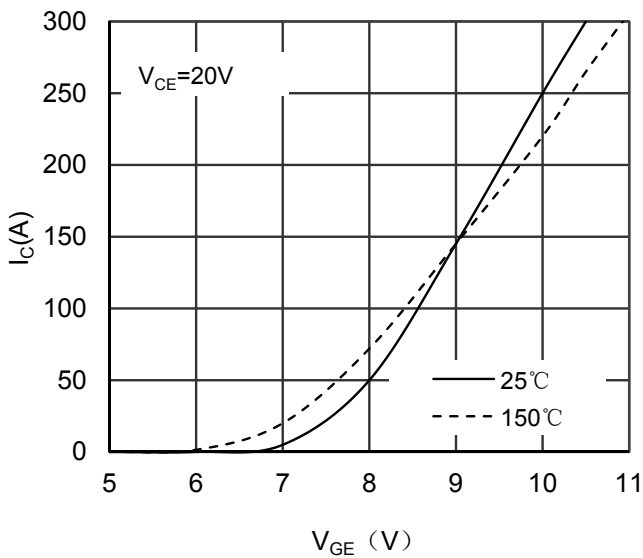


Figure 3. Typical Transfer characteristics

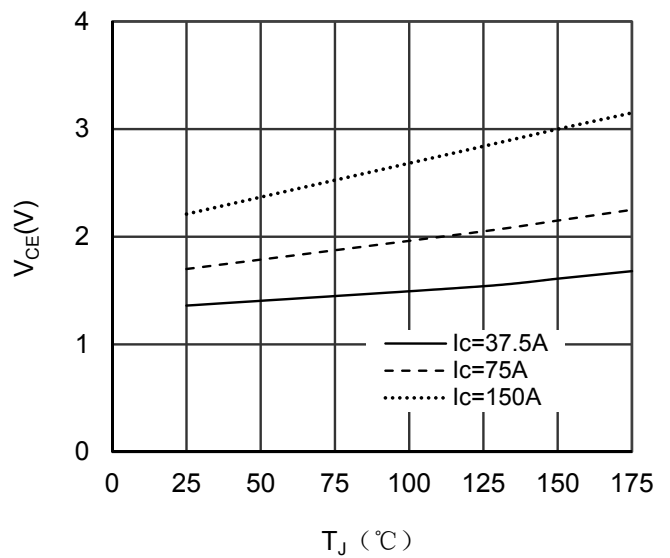


Figure 4. Collector-Emitter Voltage vs Junction temperature

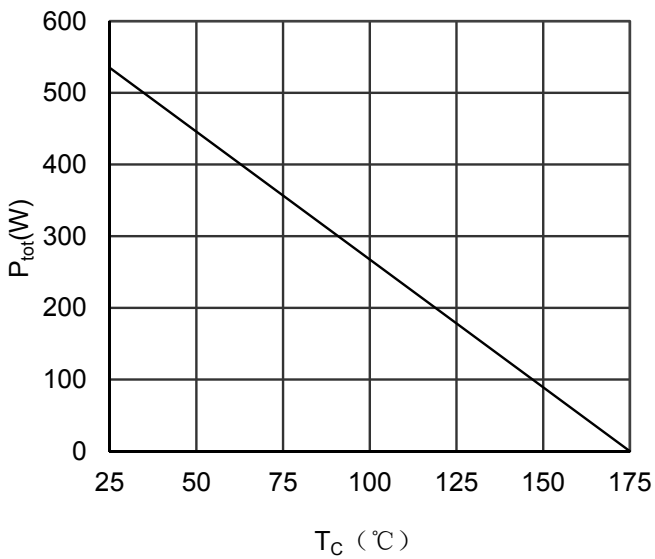


Figure 5. Power Dissipation vs Case temperature

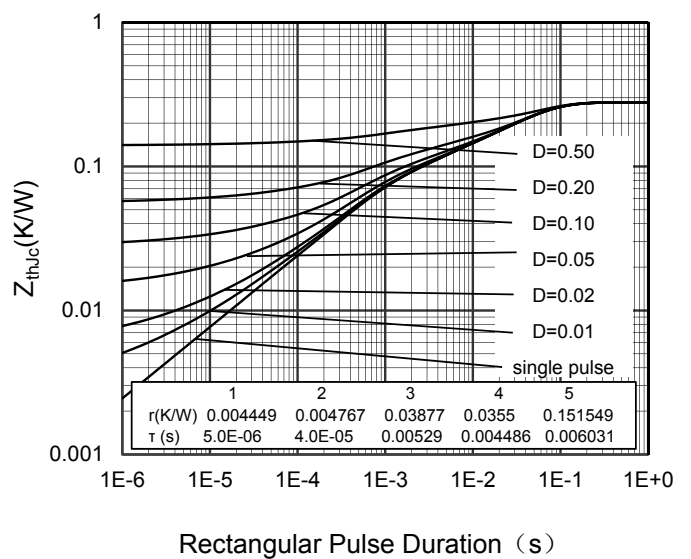


Figure 6. IGBT Transient Thermal Impedance

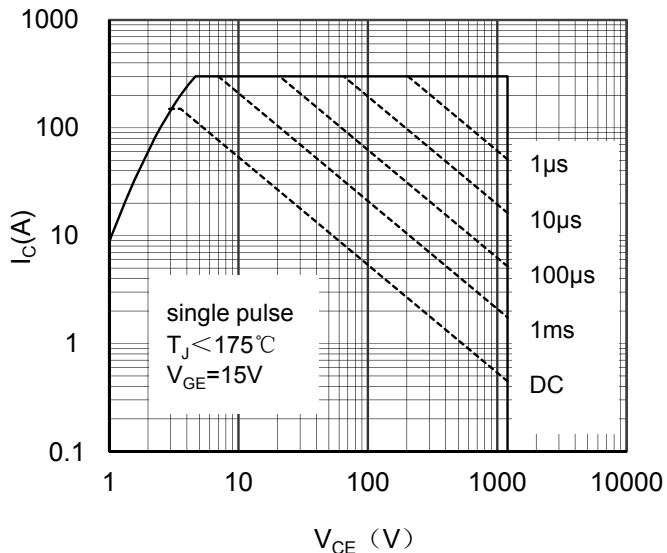


Figure 7. Forward Biased Safe Operating Area

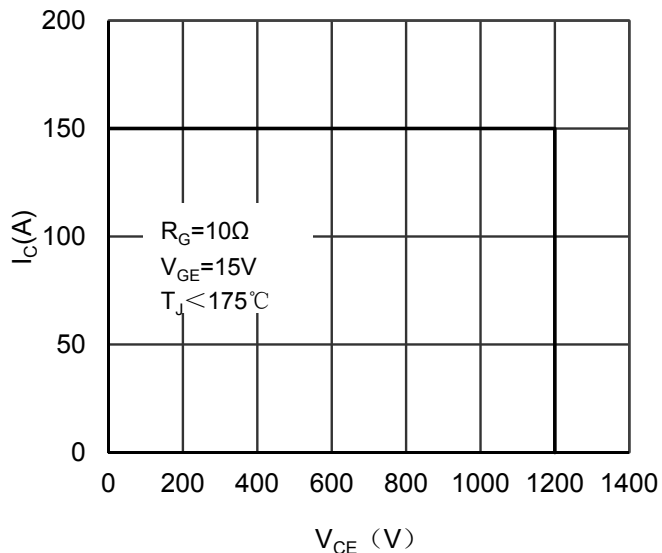


Figure 8. Reverse Biased Safe Operating Area

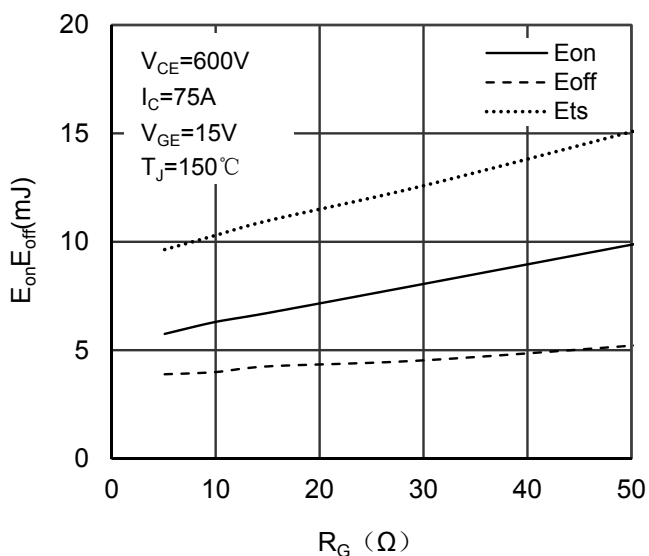


Figure 9. Switching Energy vs Gate Resistor

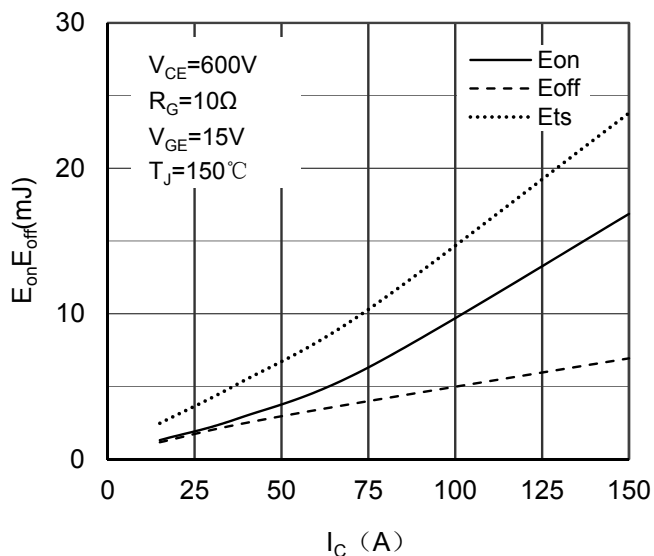


Figure 10. Switching Energy vs Collector Current

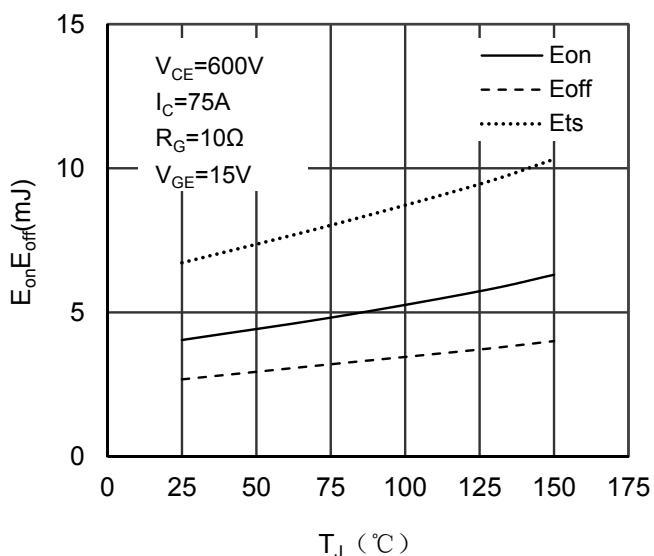


Figure 11. Switching Energy vs Junction temperature

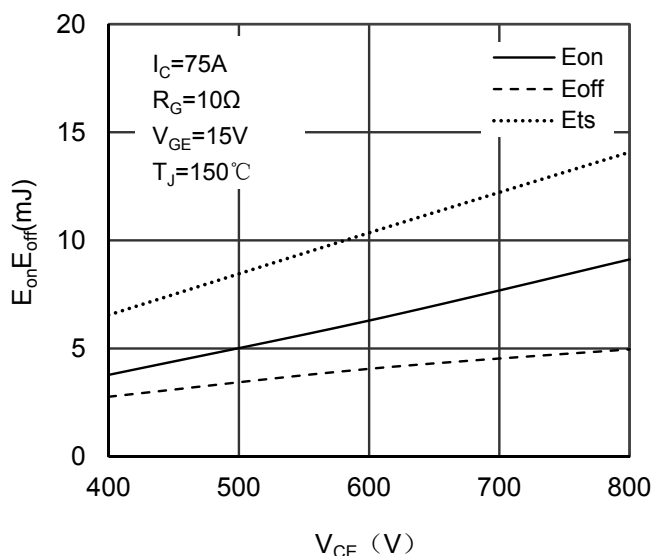


Figure 12. Switching Energy vs Collector-Emitter Voltage

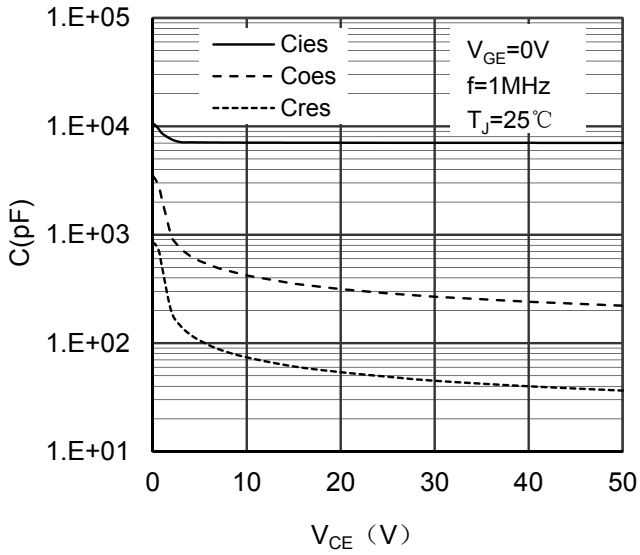


Figure 13. Typical capacitance

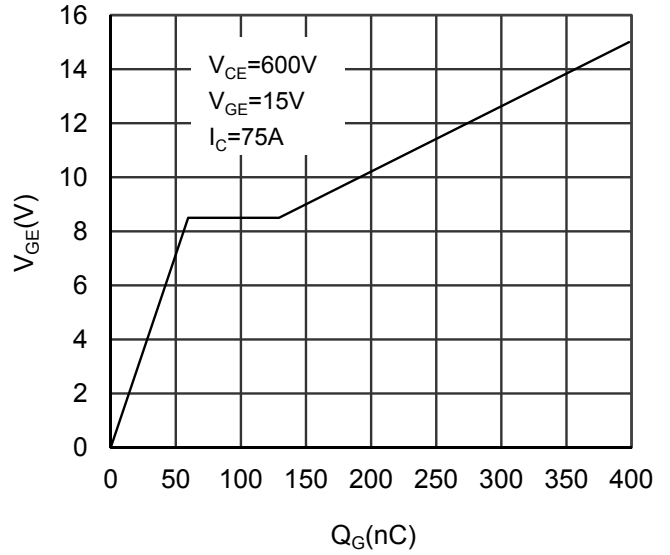


Figure 14. Typical Gate Charge

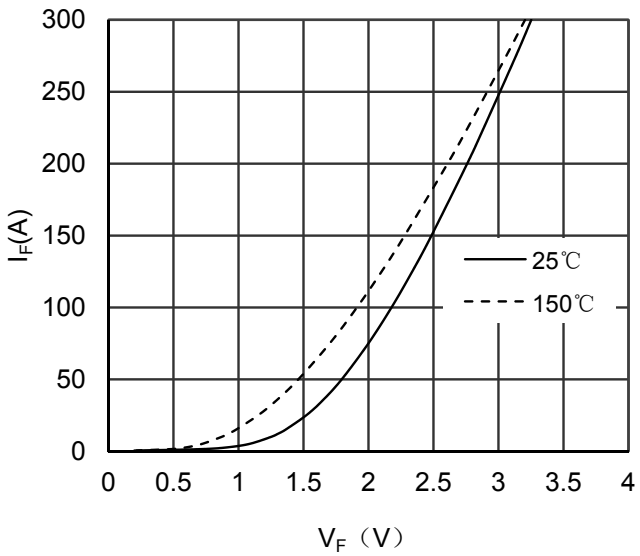


Figure 15. Diode Forward Characteristics

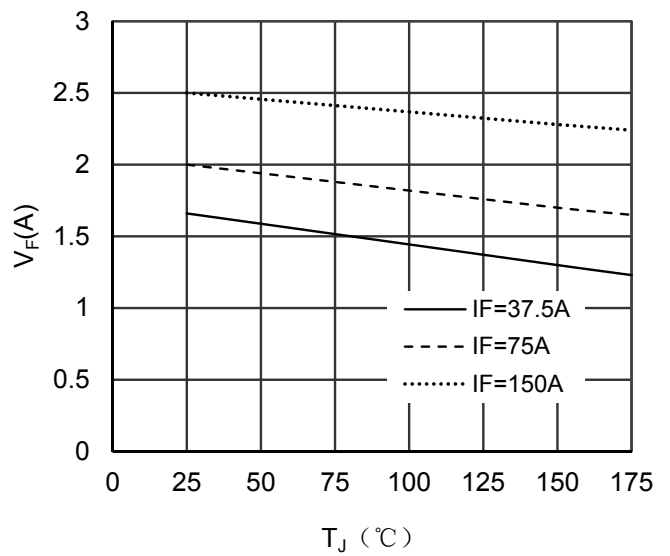


Figure 16. Forward Voltage vs Junction temperature

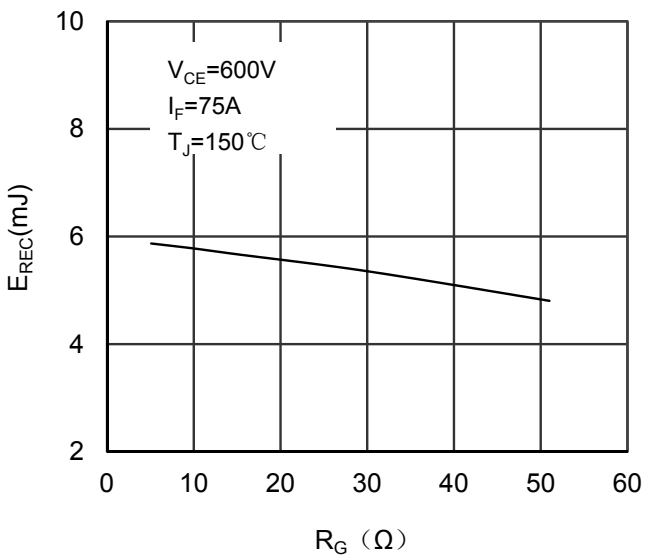


Figure 17. Switching Energy vs Gate Resistor

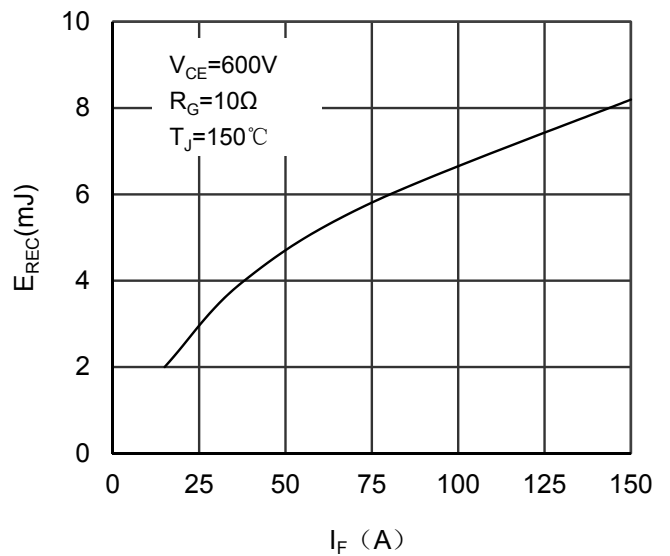


Figure 18. Switching Energy vs Forward Current

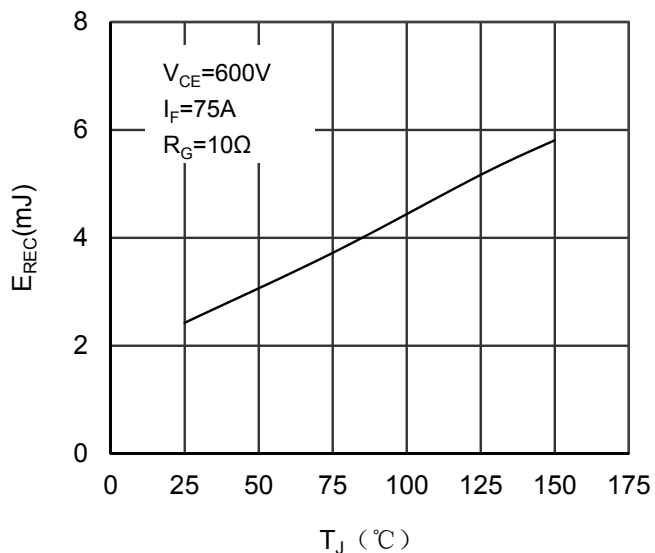


Figure 19. Switching Energy vs Junction temperature


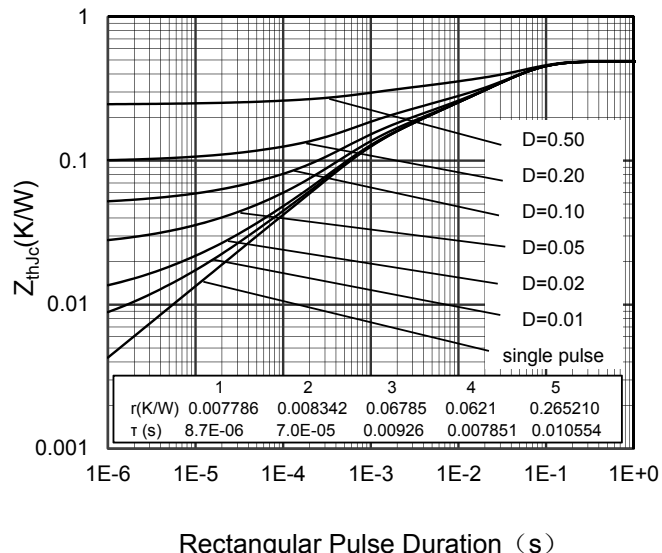


Figure 20. Diode Transient Thermal Impedance

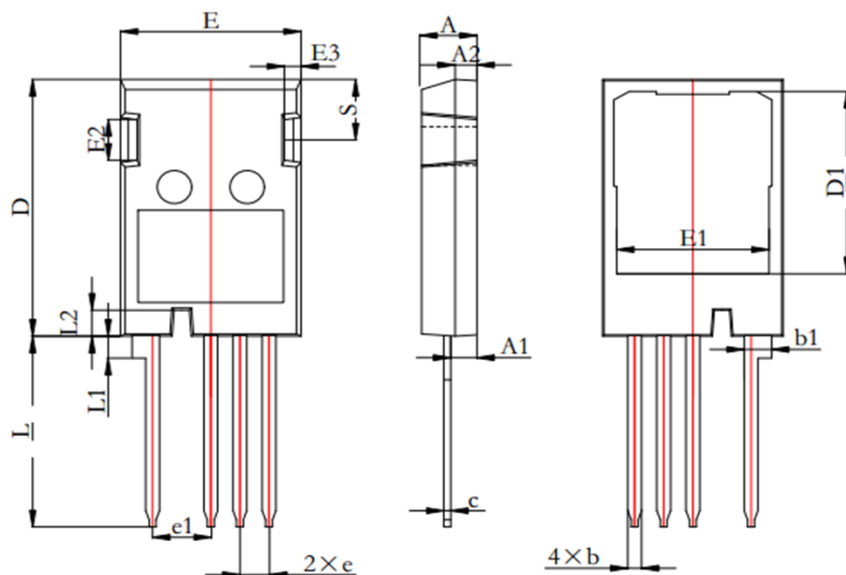

Symbol	Min	Nom	Max
A	4.83	5.02	5.21
A1	2.29	2.42	2.54
A2	1.91	2.04	2.16
b	1.07	1.20	1.33
b1	2.39	2.54	2.69
c	0.55	0.62	0.68
e	2.54BSC		
e1	5.08BSC		
E	15.75	15.94	16.13
E1	12.38	12.91	13.43
E2	3.68	4.39	5.10
E3	1.00	1.14	1.90
D	23.30	23.45	23.60
D1	16.25	17.10	17.65
L	17.31	17.57	17.82
L1	1.80	2.00	2.20
L2	2.35	2.50	2.65
S	5.49	5.75	6.00

Figure 21. Package Outline